


REINFORCED CONCRETE SAFETY APRON DETAILS
12" TO 24" DIAMETER

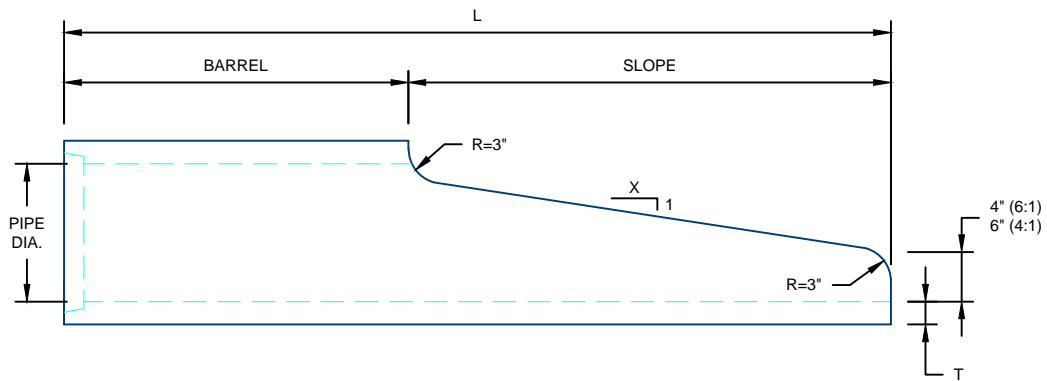

SLOPED END SECTION
12"-24" DIAMETER

DIA	X	T	SLOPE	BARREL	L	LENGTHS		WEIGHTS	
						SECT. #1	SECT. #2	SECT. #1	SECT. #2
12	6	2"	3'-6"	2'-6"	6'-0"	6'-0"	N/A	415#	N/A
15	6	2 $\frac{1}{4}$ "	5'-0"	2'-0"	7'-0"	7'-0"	N/A	595#	N/A
18	6	2 $\frac{1}{2}$ "	6'-9"	1'-3"	8'-0"	8'-0"	N/A	850#	N/A
24	6	3"	10'-0"	2'-0"	12'-0"	6'-0"	6'-0"	1,280#	720#
18	4	2 $\frac{1}{2}$ "	3'-10"	2'-2"	6'-0"	6'-0"	N/A	750#	N/A
24	4	3"	6'-0"	2'-0"	8'-0"	8'-0"	N/A	1,450#	N/A

NOTES:

1. MANUFACTURED IN ACCORDANCE WITH ASTM C-76.

For more information about our products please contact us at:
(320) 392-5207

www.hancockconcrete.com

© 2015 Hancock Concrete Products, LLC