


12" TO 36" DIAMETER

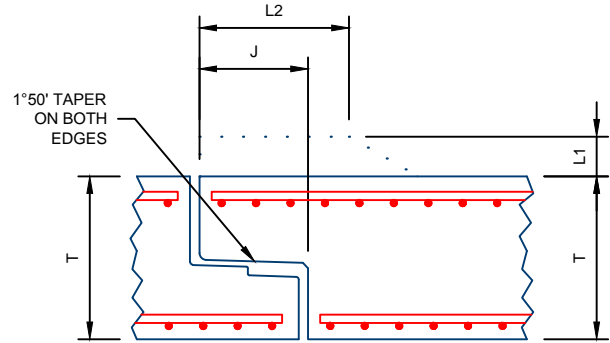

42" TO 120" DIAMETER

| D: INTERNAL DIAMETER OF PIPE IN IN. | CROSS SECTIONAL WATER AREA (SQ. FT) | WEIGHT PER LINEAR FOOT OF PIPE (LBS) | T: MINIMUM WALL THICKNESS | J: LENGTH OF JOINT | L1: B WALL | L1: C WALL | L2: MINIMUM |
|-------------------------------------|-------------------------------------|--------------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|
| 12 | 0.79 | 153 | 3" | 3 ³ / ₈ " | 2" | 0 | 5" |
| 15 | 1.23 | 191 | 3" | 3 ⁵ / ₈ " | 2 ³ / ₁₆ " | 0 | 4 ³ / ₄ " |
| 18 | 1.77 | 185 | 2 ¹ / ₂ " | 3 ⁵ / ₈ " | 2 ³ / ₈ " | 0 | 5" |
| 21 | 2.40 | 238 | 2 ³ / ₄ " | 3 ³ / ₈ " | 2 ¹ / ₈ " | 0 | 5 ¹ / ₄ " |
| 24 | 3.14 | 295 | 3" | 3 ⁷ / ₈ " | 2 ¹ / ₄ " | 2" | 5 ¹ / ₂ " |
| 27 | 3.98 | 362 | 3 ¹ / ₄ " | 4" | 2 ¹ / ₄ " | 2" | 5 ¹ / ₂ " |
| 30 | 4.91 | 480 | 4 ¹ / ₄ " | 4" | 2 ³ / ₄ " | 2" | 5 ¹ / ₂ " |
| 33 | 5.94 | 600 | 4 ¹ / ₂ " | 4 ¹ / ₈ " | 2 ⁷ / ₈ " | 2 ¹ / ₈ " | 6" |
| 36 | 7.07 | 680 | 4 ³ / ₄ " | 4 ¹ / ₂ " | 3 ¹ / ₈ " | 2 ³ / ₈ " | 7" |
| 42 | 9.62 | 870 | 5 ¹ / ₄ " | 4 ⁵ / ₈ " | 0 | 0 | 0 |
| 48 | 12.57 | 1100 | 5 ³ / ₄ " | 4 ³ / ₄ " | 0 | 0 | 0 |
| 54 | 15.90 | 1315 | 6 ¹ / ₄ " | 5" | 0 | 0 | 0 |
| 60 | 19.63 | 1525 | 6 ³ / ₄ " | 5" | 0 | 0 | 0 |
| 66 | 23.76 | 1820 | 7 ¹ / ₄ " | 5" | 0 | 0 | 0 |
| 72 | 28.27 | 2040 | 7 ³ / ₄ " | 5 ¹ / ₄ " | 0 | 0 | 0 |
| 78 | 33.18 | 2100 | 8 ¹ / ₄ " | 5" | 0 | 0 | 0 |
| 84 | 38.48 | 2410 | 8 ³ / ₄ " | 5" | 0 | 0 | 0 |
| 96 | 50.27 | 3380 | 9.75" | 5" | 0 | 0 | 0 |
| 108 | 63.62 | 3870 | 10" | 5" | 0 | 0 | 0 |
| 120 | 78.54 | 4720 | 11" | 6" | 0 | 0 | 0 |

NOTES:

1. ALL PIPE IS MANUFACTURED IN ACCORDANCE WITH ASTM C-76 & C-443

For more information about our products please contact us at:
(605) 335-7807

www.hancockconcrete.com

© 2015 Hancock Concrete Products, LLC